

NHRS115C6 Brushless DC/AC Servomotors

Technical Data

Parameter	Unit	-130	-88	-64
General				
Voltage Gradient No Load Line-Line	Volts/1000RPM	130	88	64
Max. Motor EMF Line-Line	Volts	700	530	380
Max. Speed	RPM	5400	6000	6000
Continuous Stall Torque TENV (110K) ³	Nm	6.8	6.8	6.8
Continuous Stall Torque when fitted to Heatsink (Size 300 x 300 x 12 mm)	Nm	7.5	7.5	7.5
Peak Stall Torque	Nm	22	22	22
Continuous Stall Current rms ³	Amps	4.5	6.6	9.1
Rotor Polar Moment of Inertia	kgcm ²	5.1	5.1	5.1
Maximum Current (Peak)	Amp	24	35	48
Cogging Torque	Nm	0.17	0.17	0.17
Torque Constant K _T rms ^{1,2}	Nm/Amp	1.53	1.02	0.75


Winding

Resistance Line-Line ¹	Ohms	3.7	1.7	0.9
Inductance Line-Line	Millihenrys	28	12.6	6.7
Insulation Class		F	F	F
Max. Ambient Temperature	°C	40	40	40
Thermal Time Constant	Minutes	45	45	45
Thermal Resistance	°C/Watt	0.64	0.64	0.64
Static Friction Torque	Nm	0.066	0.066	0.066
Motor Weight	kg	8.1	8.1	8.1

Tolerance All data is subject to a tolerance of ± 10% (except motor 'Voltage Gradient' and K_t which are to +15%/-5%).

- At 25°C.
- Note that K_t is shown as a combined value for all **three phases**.
- The temperature rise Δ T on the windings is 110K and applies to all continuous torque values. The maximum ambient temperature is 40°C and therefore the temperature on the windings should not be more than 150°C. A value higher than 150°C would exceed the class F insulation temperature specification.

NHRS115C6 on 300V

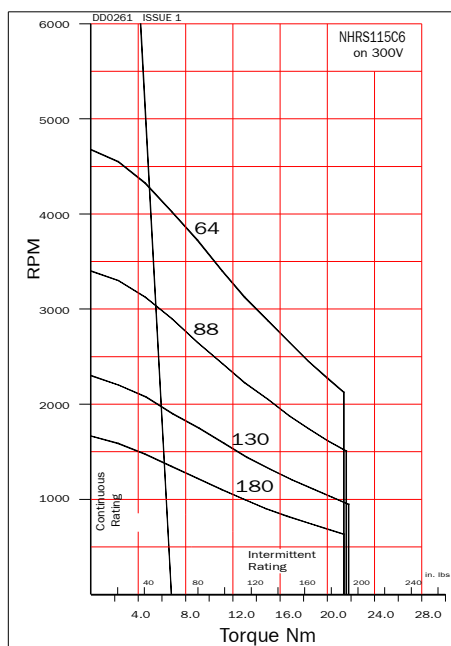

NHRS115C6 on 560V

