

NHRS115E6 Brushless DC/AC Servomotors

Technical Data

Parameter	Unit	-180	-130	-88
General				
Voltage Gradient No Load Line-Line	Volts/1000RPM	180	130	88
Max. Motor EMF Line-Line	Volts	700	700	530
Max. Speed	RPM	3900	5400	6000
Continuous Stall Torque TENV (110K) ³	Nm	9.8	9.8	9.8
Continuous Stall Torque when fitted to Heatsink (Size 300 x 300 x 12 mm)	Nm	10.8	10.8	10.8
Peak Stall Torque	Nm	33	33	33
Continuous Stall Current rms ³	Amps	4.7	6.4	9.5
Rotor Polar Moment of Inertia	kgcm ²	7.5	7.5	7.5
Maximum Current (Peak)	Amp	26	36	53
Cogging Torque	Nm	0.24	0.24	0.24
Torque Constant K _T rms ^{1,2}	Nm/Amp	5.1	1.53	1.02


Winding

Resistance Line-Line ¹	Ohms	4.2	2.1	1.01
Inductance Line-Line	Millihenrys	34	18	8.1
Insulation Class		F	F	F
Max. Ambient Temperature	°C	40	40	40
Thermal Time Constant	Minutes	55	55	55
Thermal Resistance	°C/Watt	0.58	0.58	0.58
Static Friction Torque	Nm	0.066	0.066	0.066
Motor Weight	kg	10.5	10.5	10.5

Tolerance All data is subject to a tolerance of ± 10% (except motor 'Voltage Gradient' and K_T which are to +15%/-5%).

- At 25°C.
- Note that K_T is shown as a combined value for all **three phases**.
- The temperature rise Δ T on the windings is 110K and applies to all continuous torque values. The maximum ambient temperature is 40°C and therefore the temperature on the windings should not be more than 150°C. A value higher than 150°C would exceed the class F insulation temperature specification.

NHRS115E6 on 300V

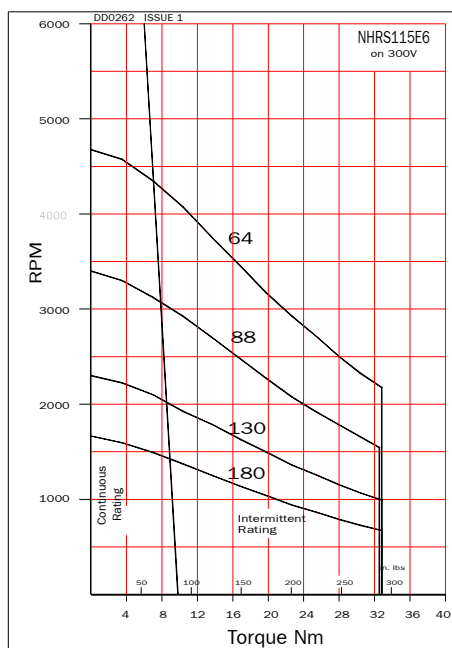

NHRS115E6 on 560V

